










RSGC-T-48100

Split phase output inverter

-  Pure sine wave waveform
AC output 120V / 240V
-  Dual MPPT with up to
99.9% efficiency
-  Compatible with Gel, AGM, Flooded,
Sealed lead acid and Lithium battery
-  Comprehensive protection
-  Exclusive Li-ion battery BMS
dual activation
-  Comfortable installation
and commissioning

RoHS FCC CE

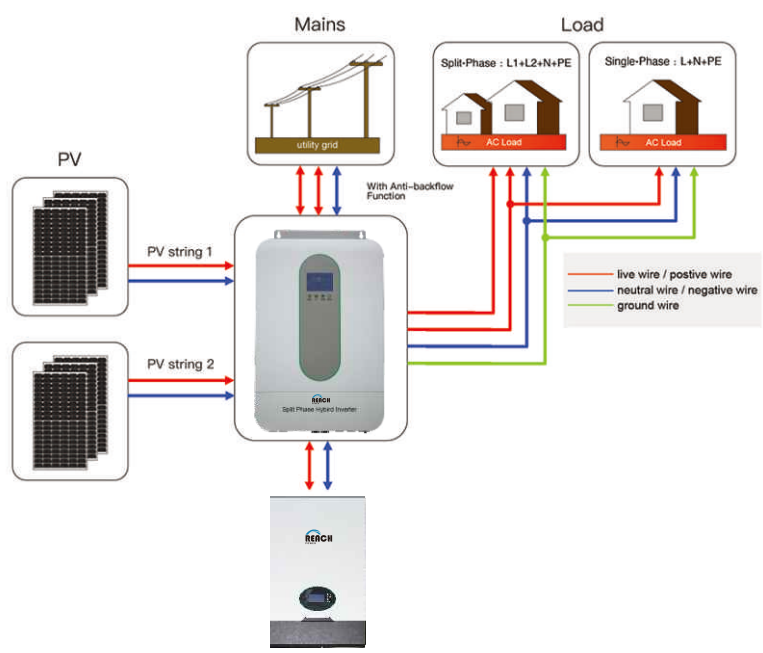

MODEL	RSGC-T-4880	RSGC-T-48100	CAN BE SET
INVERTER OUTPUT			
Rated Output Power	8,000W	10,000W	
Max.Peak Power	16,000W	20,000W	
Rated Output Voltage	120/240Vac (L1/L2/N/PE split phase)		Y
Load Capacity of Motors	5HP	6HP	
Rated AC Frequency	50/60Hz		Y
Waveform	Pure Sine Wave		
Switch Time	10ms (typical)		
Parallel capacity	/		
BATTERY			
Battery Type	Li-ion / Lead-Acid / User Defined		Y
Rated Battery Voltage	48Vdc		
Voltage Range	40-60Vdc		Y
Max.MPPT Charging Current	200A		Y
Max.Mains/Generator Charging Current	100A	120A	Y
Max.Hybrid Charging Current	180A	200A	Y
PV INPUT			
Num. of MPPT Trackers	2		
Max.PV array power	11,000W		
Max.input current	22/22A		
Max.Voltage of Open Circuit	500Vdc		
MPPT Voltage Range	125-425Vdc		
MAINS / GENERATOR INPUT			
Input Voltage Range	90-140Vac		
Frequency Range	50/60Hz		
Bypass Overload Current	63A		
EFFICIENCY			
MPPT Tracking Efficiency	99.9%		
Max. Battery Inverter Efficiency	92%		
GENERAL			
Dimensions	620*435*130mm (2*1.4*0.4ft)		
Weight	20kg (44lb)	21kg (46.3lb)	
Protection Degree	IP20, Indoor Only		
Operating Temperature Range	-15~55°C, >45°C derated (5~131°F, >113°F derated)		
Noise	<60dB		
Cooling Method	Internal Fan		
Warranty	2 Years		
COMMUNICATION			
Embedded Interfaces	RS485 / CAN / USB / Dry contact		Y
External Modules (Optional)	Wi-Fi / GPRS		Y
CERTIFICATION			
Safety	IEC62109-1, IEC62109-2, UL1741		
EMC	EN61000-6-1, EN61000-6-3, FCC 15 class B		
RoHS	Yes		